1 Removing or re-fitting your seat unit

(the seat cover must be removed before fitting the infant carrier)



HANDY HINT

You may find it easier to apply the brake before removing or re-fitting the seat unit. Please refer to the user guide for your buggy for operation of the brake.

Unfasten the press studs on the backrest and unfasten the hook and loop fastenings on both sides of the seat unit where it overlaps the hood (dia 1a).



You may find it easier


to stand behind or to the side of the buggy. Remove the hood and bumper bar by simultaneously pressing the buttons on the mouldings on both sides of the buggy and slide them upwards until they disengage



Unfasten the hook and loop fastenings and press studs shown by the red circles (dia 1c)



Unclip the hooks on both sides of the buggy (dia 1d).




Then slide the top tabs upwards and out of the grooves until the seat unit is disengaged (dia 1e).

To re-fit the seat unit reverse these instructions.



2 Attaching your child seat for use as a travel system

(this vehicle is intended for children from birth and up to 13kgs)



HANDY HINT-

You may find it easier to apply the brake when fitting the child seat. Please refer to the user guide for your buggy.

Clip the socket onto the chassis from the inside. Align the bottom edge of the socket with the edge shown on the chassis (dia 2a). Rotate the fixing arm. Squeeze the housing and fixing arm together with one hand and snap over the hook with the other hand. Repeat this process for both sockets.

Ensure that the left hand and right hand sockets are used on the correct side of the buggy.



To fit the adaptor to the child seat squeeze the lever and insert into the space below the handle (dia 2b). Make sure it is fully fitted and release the lever to lock into place. Repeat this process for both adaptors.

Ensure that the left hand and right hand adaptors are used on the correct side of the child seat.

must be removed before attaching your car seat.



Lower the child seat sure that the adaptor on either side drops (dia 2c). Push down engaged you will hear a click

IMPORTANT -

The buggy seat unit seat attachment



onto the buggy making into both the sockets on each side of the buggy firmly. Once the seat is

the rocking position. Please refer to the user guide for the child seat.

devices are correctly engaged before use. IMPORTANT -



Move the handle to **WARNING** -

Check that the child

Ensure your child is harnessed at all times.



To remove the child seat move the handle to the carrying position. Lift the lever on the adaptors and lift the child seat out of the sockets (dia 2d).

IMPORTANT


It may be necessary to remove the adaptors from the child seat when installing it in your vehicle.

If the adaptors are in contact with the vehicle seat cushion, remove them.

To remove the adaptors from the child seat, pull the lever on the adaptors away from the child seat while pulling down (dia 2e). Repeat the process for both adaptors.

The child seat is compatible with the ISOFIX base (purchased separately). See www.britax.eu for



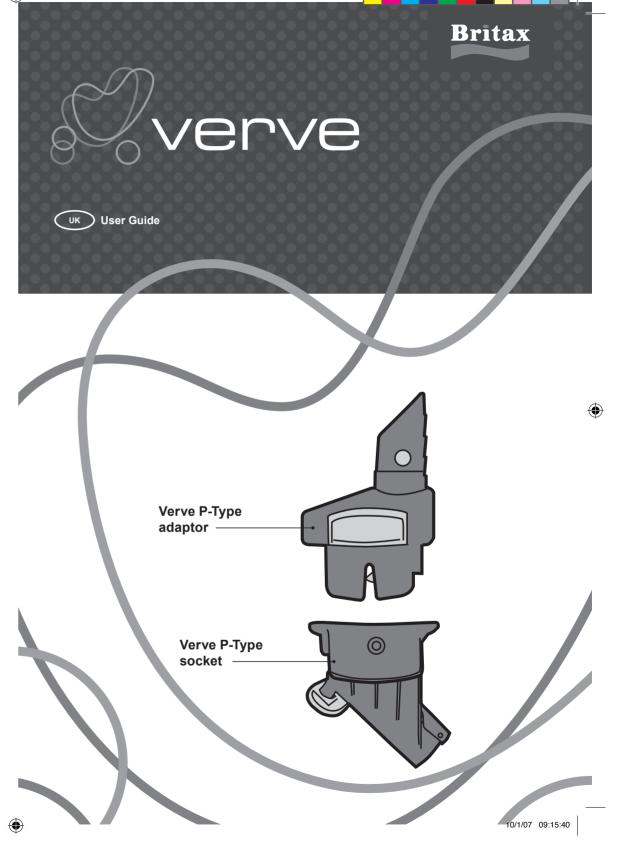





Read these instructions carefully before use and keep them for further reference. Your child's safety may be affected if you do not follow these instructions.

Please read this User Guide carefully BEFORE trying to use your buggy

Looking after your buggy

The buggy and its cover have been carefully designed, manufactured and tested to high safety standards.

Regularly inspect and maintain your buggy to ensure freedom of movement of the locking devices and security of components. To prolong the life of your buggy, keep it clean and do not leave it in direct sunlight for extended periods of time.

Helpful hints

Regularly clean and inspect your buggy.

To ensure trouble free operation lubricate moving parts and joints with a silicon based spray. If the wheels squeak use a silicon based spray or light lubricating oil ensuring it penetrates the wheel and axle assembly.

When using the buggy on the beach, clean it completely afterwards to remove all the sand and salt from the mechanisms and wheel assemblies.

Under certain climate conditions the covers and trims may be affected by mould and mildew. To help prevent this occurring, do not fold or store this buggy if it is wet or damp. Always store in a well ventilated area.

Cleaning the cover

The hood, seat covers and trims may be cleaned using warm water with household soap or mild detergent. Allow it to dry fully, away from direct sunlight.

DO NOT dry clean or use bleach or any other aggressive cleaning agents.

To maintain the safety of your buggy, seek prompt repairs for bent, torn or broken parts. Use only those parts and accessories approved by Britax. Replacement parts and

accessories are available from your Britax stockist or contact Britax Customer Service Department on 01264 386034. This product is not intended for commercial use.

Guarantee

All Britax products are carefully designed, manufactured and tested. However, should this product prove faulty within six months of purchase due to a materials or manufacturing fault please return it to the original place of purchase. We will then, at our discretion, either repair it free of charge or replace it with the same or a similar product.

For guarantee purposes proof of purchase will be required. We recommend that you retain your receipt and attach it to this user guide. They should be kept in a safe place.

Britax does not accept liability for damage arising from abuse, misuse or negligence. This guarantee is not transferable and therefore does not apply to second-hand products.

Your statutory rights are not affected by this guarantee.

⚠ WARNING – A CHILD'S SAFETY IS YOUR RESPONSIBILITY

WARNING - Ensure that all locking devices are engaged before use.

WARNING - Children must be harnessed at all times.

WARNING - Overloading, incorrect folding and the use of non-approved accessories may damage or break this buggy and make it unstable for use.

WARNING - Regularly inspect the buggy to ensure all parts are in full working order.

WARNING - Any load attached to the handle affects the stability of the pushchair.

WARNING - This seat is not suitable for running or skating.

WARNING - It may be dangerous to leave your child unattended.

DO NOT leave or place your child in a position where they are exposed to the sun. The canopy or hood on this product will not give your child total protection from the harmful rays of the sun.

DO NOT allow the buggy to remain wet for prolonged periods of time. If it does get wet, allow to dry unfolded at room temperature.

DO NOT place more that 4kg in the basket.

DO NOT allow children to play with or adjust the buggy.

DO NOT carry more than one child on this buggy.

DO NOT use accessories that are not approved by Britax Excelsior Limited.

DO NOT use a PVC rain cover indoors, in a hot atmosphere or near a direct heat source - your child might overheat.

DO read the cleaning instructions for the cover.

DO ensure children are clear of moving parts and locking devices while making adjustments.

DO periodically check that any screws, nuts, bolts and other fastenings are fully tightened.

DO store the buggy in a safe place when not in use. Avoid placing heavy objects on top of it and do not store near direct heat sources, e.g. radiators, open bar fires or in direct sun light as the cover may fade.

ALWAYS remove the child from the buggy before going up or down stairs or escalators.

This buggy is designed and manufactured to comply to EN1888: 2005.



Britax Excelsior Limited

1 Churchill Way West Andover Hampshire SP10 3UW United Kingdom

A Britax Childcare company

Customer Service Helpline: 01264 386034 Email: helpline@uk.britaxeurope.com Switchboard: +44 (0) 1264 333343 Fax: +44 (0) 1264 334146

www.britax.eu



